

LIVE ON A
**PURE
NATURE**

TWIN

SANDHYA



Leopard Vitrified Pvt. Ltd.
Matel Road, At. Matel, Wankaner-363 621, Gujrat (INDIA).

E : marketing@leopardvitrified.com | Phone No. :
Web : www.leopardvitrified.com | +91 99252 71212

600x600mm / 60x60cm
Twin Charge Polished Vitrified Tiles



NEW NAME OF CERAMIC TREND
nuevo nombre de tendencia de cerámica



MINI T SAND

Today, Leopard Group is a major reference on the Indian and international markets, operating in accordance with firmly-consolidated values such as innovation and quality, and especially the trust it has placed in its extensive human capital, and its ongoing concern for its stakeholders. With more than 15 years' experience, Leopard Group is present in almost 15 countries worldwide, an achievement that is attributable to its unique business model, which forms the foundation for its strong, dynamic corporate strategy.

Leopard Group is a leading manufacturer of ceramic floor tiles, renowned for its advanced production techniques and the quality and versatility of its designs. A market leader in setting new trends, its flooring collections clearly demonstrate that they are profoundly inspired by natural materials, while always retaining the intrinsic properties and features of ceramic and vitrified tiles.

Its wide range of design portfolio reflects the great diversity found in our nature environment: granite, limestone, quartzite and basalt, with a particular emphasis on ceramic slates that closely reproduce the tonal richness and variety of this metamorphic rock. Collections also include a refined use of select marbles that imbue any setting with elegant distinction. The reflections of light that shimmer on the surface of the our design collection are reminiscent of an industrial look reinterpreted in ceramic, while single colour tiles create original surfaces and textures with sober tones that work together in chromatic unity



Micro Polished Surface



Stain Resistance Product



Suitable For Heavy Traffic



Premium Quality Product



an innovative approach to deigning tiles, whose quality and creativity is unmatched by any
with twin charge polished vitrified tiles supercharge your life with excellent design choices.

Strength & Beauty



600x600 mm



Breccia



TWIN
CHARGE POLISHED
VITRIFIED TILES

new name of ceramic trend
nuevo nombre de
tendencia de cerámica


leopard




TWIN
CHARGE POLISHED
VITRIFIED TILES

600x 600mm TWIN CHARGE VITRIFIED TILES NANO TECHNOLOGY



Antica

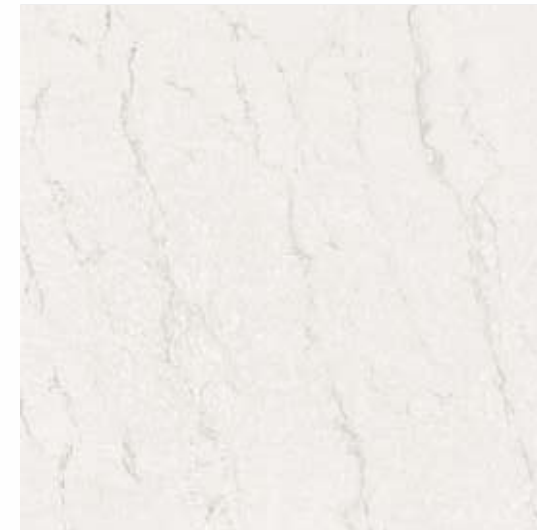

Benato



Capri

600x 600mm TWIN CHARGE VITRIFIED TILES NANO TECHNOLOGY




leopard




TWIN
CHARGE POLISHED
VITRIFIED TILES

600x
600mm TWIN CHARGE
VITRIFIED TILES NANO
TECHNOLOGY

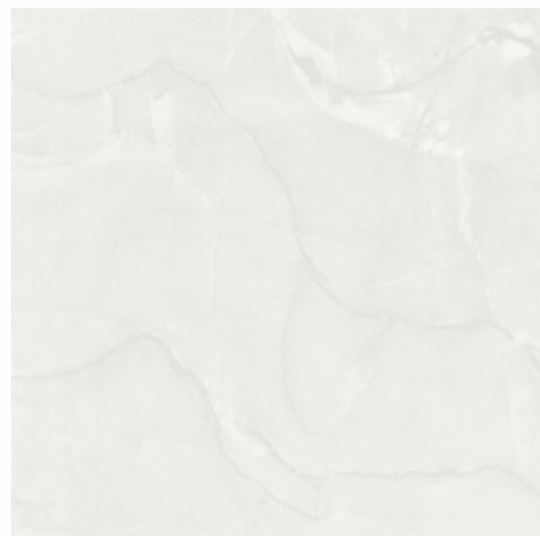


Clair

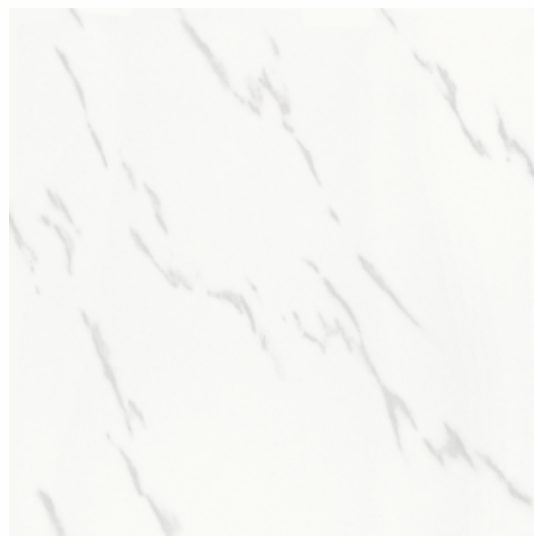

Colomy



Dali

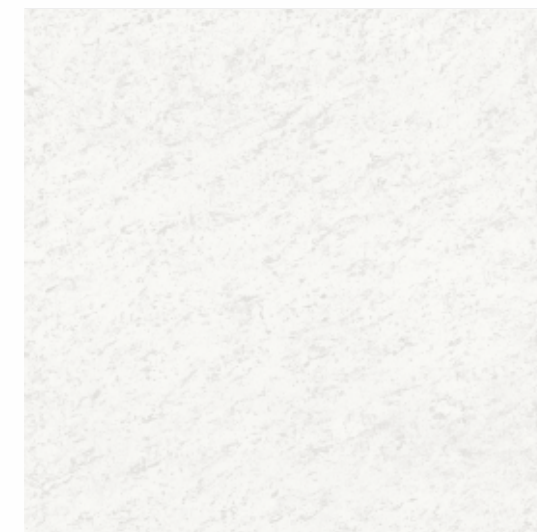

Lagoon

600x
600mm TWIN CHARGE
VITRIFIED TILES NANO
TECHNOLOGY




leopard



TWIN
CHARGE POLISHED
VITRIFIED TILES

SANDHYA


600x
600mm TWIN CHARGE
VITRIFIED TILES NANO
TECHNOLOGY

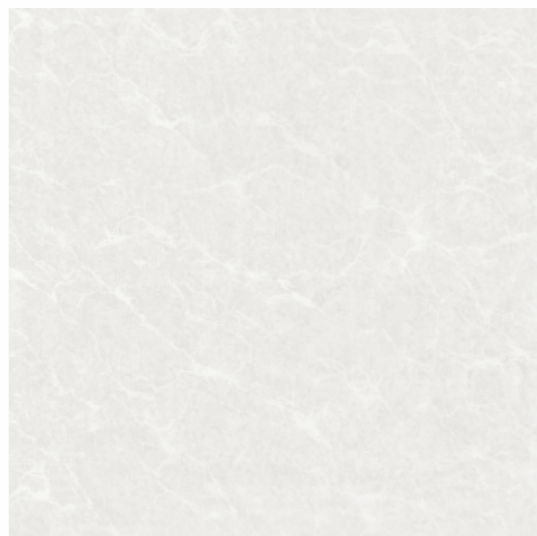


Eva



Lime Stone

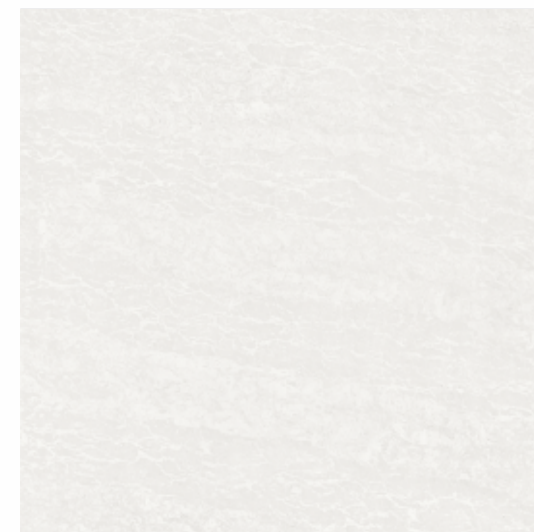

Loredo

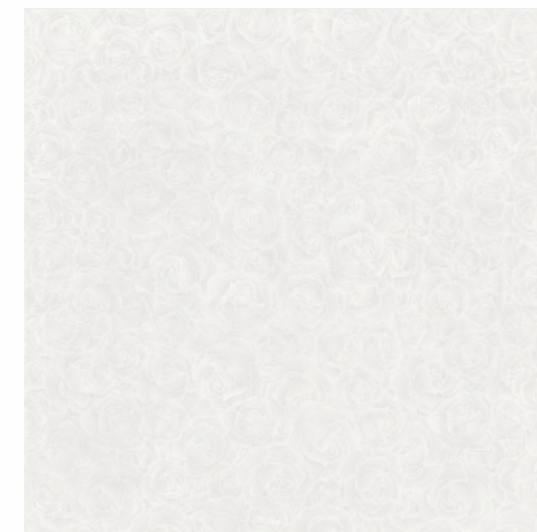

Rossa


600x
600mm TWIN CHARGE
VITRIFIED TILES NANO
TECHNOLOGY




leopard



TWIN
CHARGE POLISHED
VITRIFIED TILES

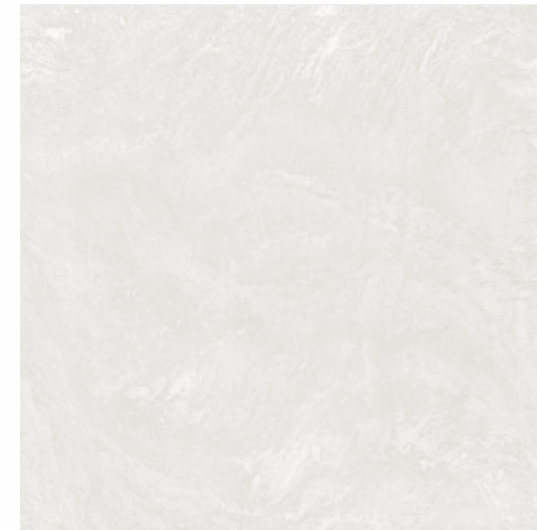


Mossa

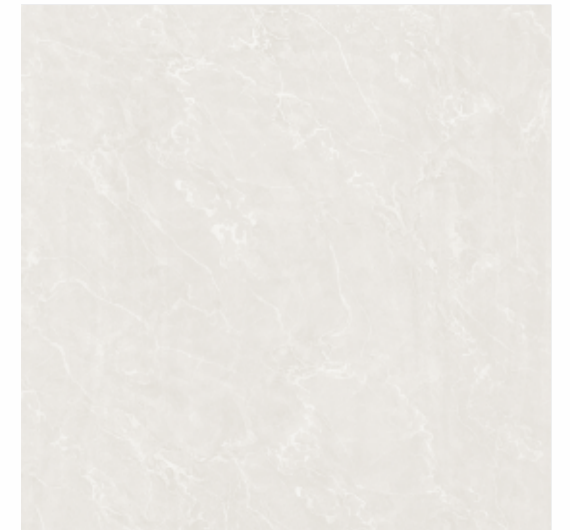

Urban

600x 600mm TWIN CHARGE VITRIFIED TILES NANO TECHNOLOGY

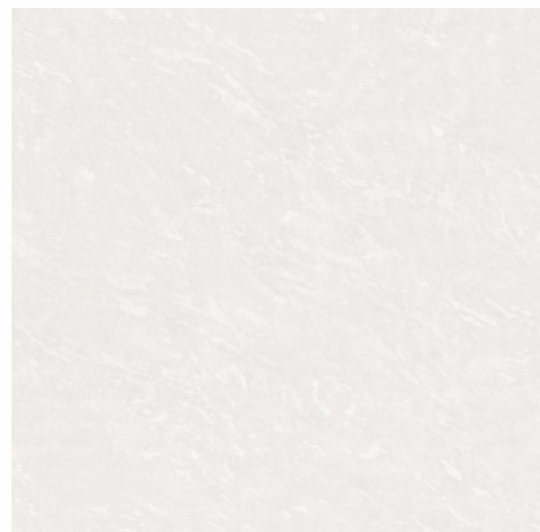

Minerva



Terani


600x 600mm TWIN CHARGE VITRIFIED TILES NANO TECHNOLOGY




leopard



TWIN
CHARGE POLISHED
VITRIFIED TILES

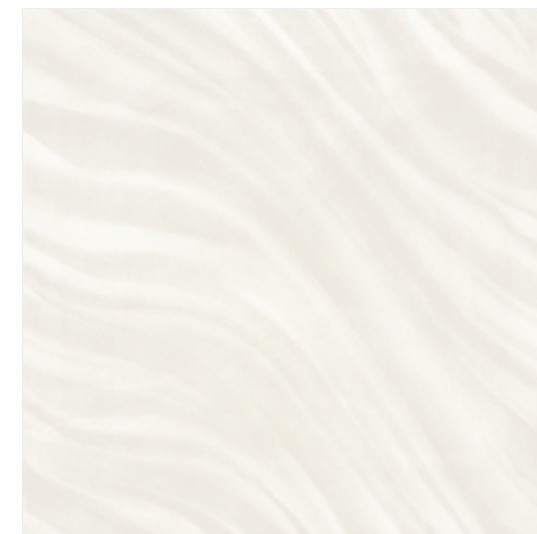

Spino

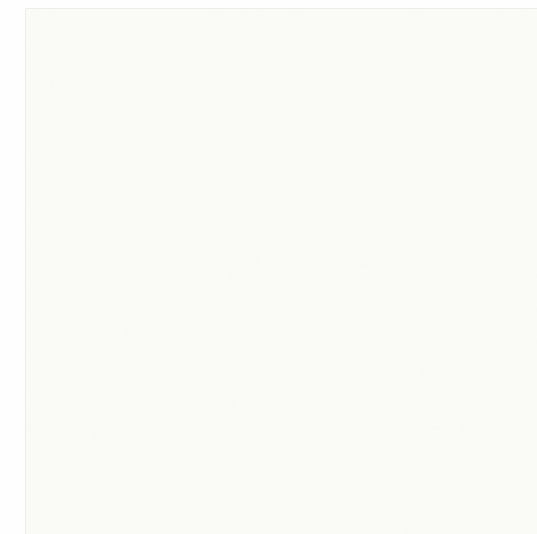


Twin White


600x 600mm TWIN CHARGE VITRIFIED TILES NANO TECHNOLOGY

SANDHYA

600x 600mm TWIN CHARGE VITRIFIED TILES NANO TECHNOLOGY

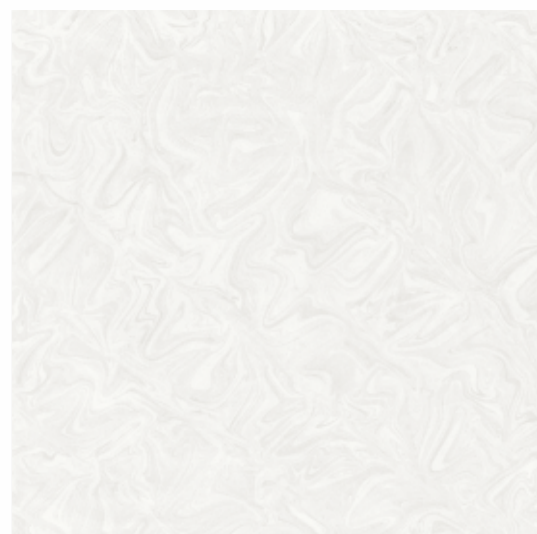

Nuvo

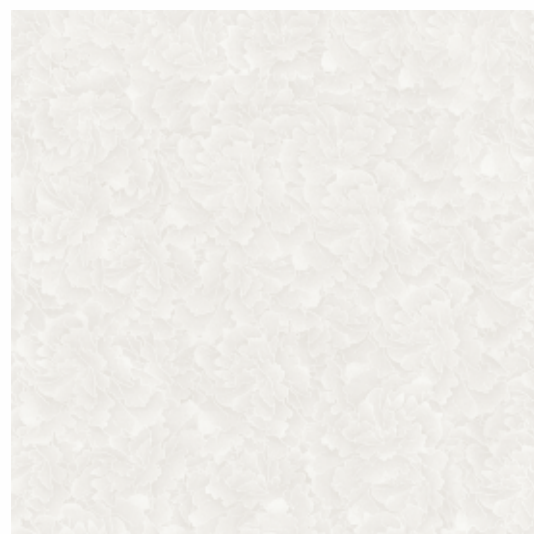

Tulip




leopard




TWIN
CHARGE POLISHED
VITRIFIED TILES


600x
600mm TWIN CHARGE
VITRIFIED TILES NANO
TECHNOLOGY

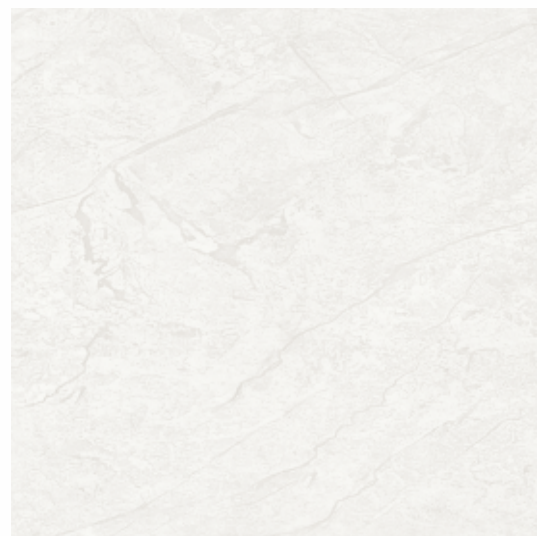

Siena

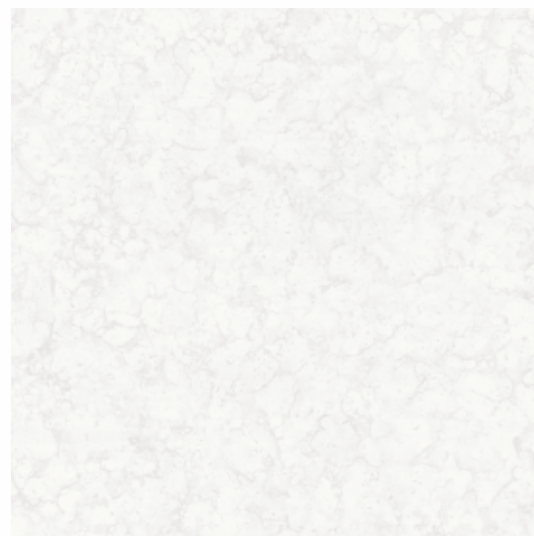

Vermont

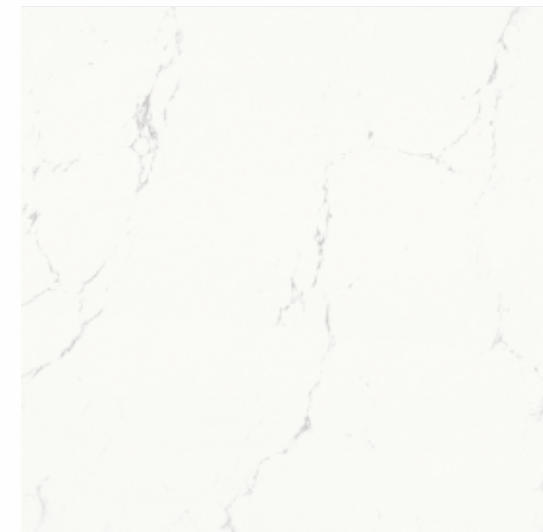

Victoria

600x
600mm TWIN CHARGE
VITRIFIED TILES NANO
TECHNOLOGY



leopard

Technical Specification

Sr. No.	PROPERTY	International Std. ISO 13006/EN 176 Group Bla	Leopard TWINCHARGE TILES Value	Method of Testing
1.	Deviation in Length	±0.6%	±0.1%	EN 98
2.	Deviation in Thickness	±0.5%	±0.1%	EN 98
3.	Straightness of Sides	±0.5%	±0.3%	EN 98
4.	Rectangularity	±0.6%	±0.3%	EN 98
5.	Surface Flatness	±0.5%	±0.2%	EN 98
6.	Water absorption *	<0.5%	<0.03%	EN 99
7.	Mohs hardness *	> 6	> 6	EN 101
8.	Flexural Strength *	> 27 N/mm ²	> 40 N/mm ²	EN 100
9.	Abrasion resistance	< 204 mm ³	< 144 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	1113 N	2500 N	ASTM C-648
12.	Density (g/cc)	> 2	2.4	DIN 51082
13.	Frost resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Expansion	< 9 x 10-6	< 6 x 10-6	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	—	89% reflection	Glossmeter

Packing Details

Size	Thickness	No. of Tiles/Box	Coverage Area	Wt. of Box
600x600mm	9.0 mm (approx.)	4 pcs.	1.44 sq. mt.	29 Kgs. (approx.)

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

